

True Fit Tank Fittings

SECTION THREE

Features and Benefits

- Designed for use in tanks, troughs and a wide variety of marine applications.
- Manufactured from UV Stabilised High Quality Glass Fibre Reinforced Nylon giving a weather, termite, fungi and bacterial resistance
- An extensive range of fittings in sizes 15mm to 100mm (1/2" to 4")
- Precision Heavy Duty Tapered Threads give a Strong Reliable Seal
- Material is strong enough to minimise potential cross threading
- Fittings provide flexibility and versatility for new and existing installations, saving on time and money
- All materials are fully resistant to salt water making them ideally suited to marine applications.

Standards & Approvals

WRAS: Hansen *True Fit* Tank Fittings carry the WRAS approval by the Water Research Council in the UK which is the highest recognised water testing organisation in the world. A WRAS approved fitting must not cause waste, misuse, undue consumption or contamination of the water supply and must be of an appropriate quality and standard.

AS/NZS 4020: Hansen *True Fit* Tank Fittings meet the requirements for products in contact with drinking water as per AS/NZS 4020 Australia & New Zealand drinking water standard. The equivalent standard to AS/NZS 4020 is BS 6920.

Conversion Chart

16 Bar – 1600 kPa – 235 Psi

12 Bar – 1200 kPa – 175 Psi

10 Bar – 1000 kPa – 145 Psi

20° Celcius – 68° Fahrenheit

Conversions

15mm - 1/2"	32mm - 1 1/4"	65mm - 2 1/2"
20mm - 3/4"	40mm - 1 1/2"	80mm - 3"
25mm - 1"	50mm - 2"	100mm - 4"


Female Tank Fitting

After the success of the Hansen Polythene Pipe Fittings, Hansen Products decided to design and manufacture a range of *True Fit* Tank Fittings as there was a high demand for high quality non-metallic fittings. The Hansen range of *True Fit* Tank Fittings was consequently born and have become well recognised internationally in both domestic and commercial markets for their reliable, dependable sealing capabilities.

Traditionally the *True Fit* Tank Fittings main use has been exactly as its name describes, for tanks! But in actual fact the Hansen Male and Female *True Fit* Tank Fittings have a greater variety of uses: Tanks, Troughs, Marine applications, Campers, Caravans, Irrigation, Home applications and a wide range of other domestic and commercial settings. The Hansen range of *True Fit* Tank Fittings have the qualifications that assure you have chosen the best tank fitting solution available for your application.

With over 60 years experience in manufacturing, Hansen Products knows the importance that pipe fittings play in the performance and control of fluid delivery, flow and pressure within a pipe system. This has seen Hansen Products build a reputation for providing high performance, easy to use, innovative, simple products that provide our customers with "Best Installed Value". All Hansen products carry our Limited Lifetime Warranty*

*For more information on our warranty please visit www.hansenproducts.com/legal.htm

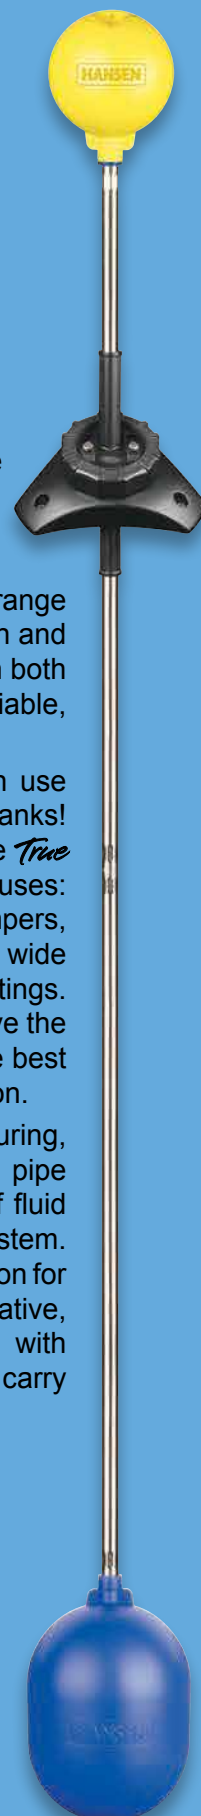Level Alert Indicator

True Fit Tank Fittings

*Used for connecting valves and pipes to tanks and troughs.
Comes with 1 x LDPE Washer & 1 x Rubber Washer.*

Female Tank Fitting Black
BSPT or NPT



Code	Size	Pack Size	RRP € excl VAT
SFTFT15	15mm	EA	5.22
SFTFT20	20mm	EA	5.05
SFTFT25	25mm	EA	6.00
SFTFT32	32mm	EA	8.97
SFTFT40	40mm	EA	11.87
SFTFT50	50mm	EA	15.00
SFTFT80	80mm	EA	59.05
SFTFT100	100mm	EA	79.50

NPT Products are a non stock items, available on request

Used for connecting Polyethylene Pipe, Flexible Pipe & Hose. Push on hose and use a hose clip to hold hose on. Used in tanks and in hulls on boats.

Male Tank Fitting Black
Hose End



Code	Size	Pack Size	RRP € excl VAT
STF15B	15mm	EA	2.87
STF20B	20mm	EA	3.78
STF25B	25mm	EA	4.37
STF32B	32mm	EA	5.70
STF40B	40mm	EA	7.12
STF50B	50mm	EA	9.53

Level Alert

Code	Size	Pack Size	RRP € excl VAT
LEVELALERT	Tank Level Alert Indicator	EA	196.88

Supplied with:

Assembled UniTri Mount

2 x 669mm Male/Female & 1 x 669mm Male/Male Stainless Steel Tube (2 metres total)

115mm Threaded HiViz Float & 230mm Long Threaded Blue Float


3 x UniTri Mount Screws & 2 x Security Lock Screws

3 x Plastic Plugs & 7mm Masonry Drill Bit for Concrete Tanks

3 x Plastic Wing Nuts and 4mm Drill Bit for Plastic Tanks

Monitor Water Levels

- ✓ Prevent Pump Burnout caused by Dry Tank Syndrome
- ✓ See at a glance your tank water level
- ✓ Suitable for any type or size tank
- ✓ Essential part of your water management
- Fully adjustable UniTri mounting base
- UniTri mount will adapt to a range of tank roof angles (max 35° angle)
- Suitable for plastic, concrete and steel tanks
- Manufactured from UV resistant durable, glass fibre reinforced nylon with stainless steel tubes (16mm diameter) and stainless steel fastenings
- Complete with all mounting fastenings for all applications
- Optional stainless steel extension tubes available (669mm)

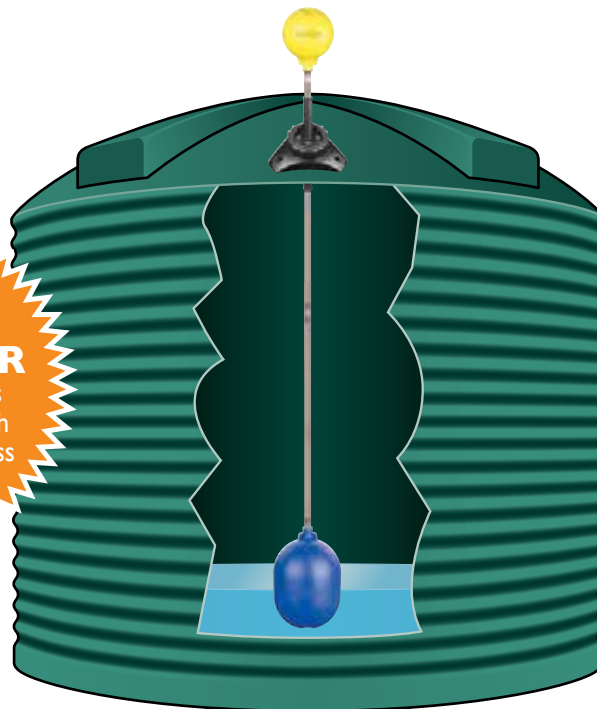

Level Alert Indicator installed in Tank



UniTri Mounting Base

The Level Alert in this catalogue is protected by intellectual property rights owned by the Hansen group of companies in New Zealand, Australia & other countries, including NZ patent 596360 and NZ registered design 415007 and Australian patent 2012203010 and registered design 340061. HANSEN is a trade mark of the Hansen group of companies.

All Prices are current at time of printing but are subject to change without notice. Prices are Exclusive of VAT

Components of the *Level* *Alert*

	Code	Size	Pack Size	RRP € excl VAT
	HLASSTUBE	669mm Stainless Steel Tube (1 x 16mm diameter Male & Male)	EA	39.38
	HDUALFLOATA	Dual Float Adapter	EA	4.17
	HFLOAT230L	155mm x 230mm Long Threaded Float Blue (for Level Alert)	EA	11.63
	HFLOAT115HI	115mm SF Threaded Float HiViz	EA	5.05